


SEALED TRANSFORMER WITH PTC CMP SERIES


FEATURES

- CQC Approved:
CQC file No.CQC13001094903
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:
INPUT:230V 4200Vrms
INPUT:115V 2800Vrms
- Operation Frequency:50/60Hz
- Resin Class B IEC 85
(20,000 h Testing to IEC 216)
- 100% Production Tested



ORDERING CODE

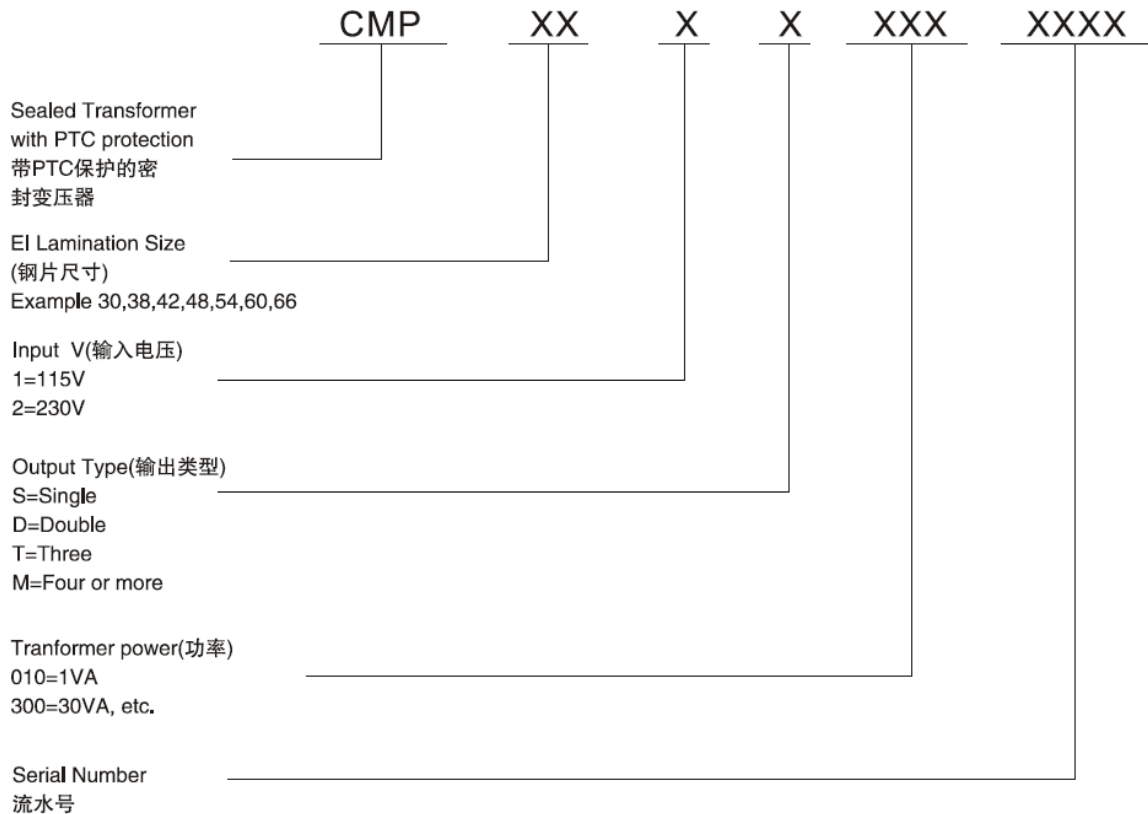

OUTLINE DIMENSIONS

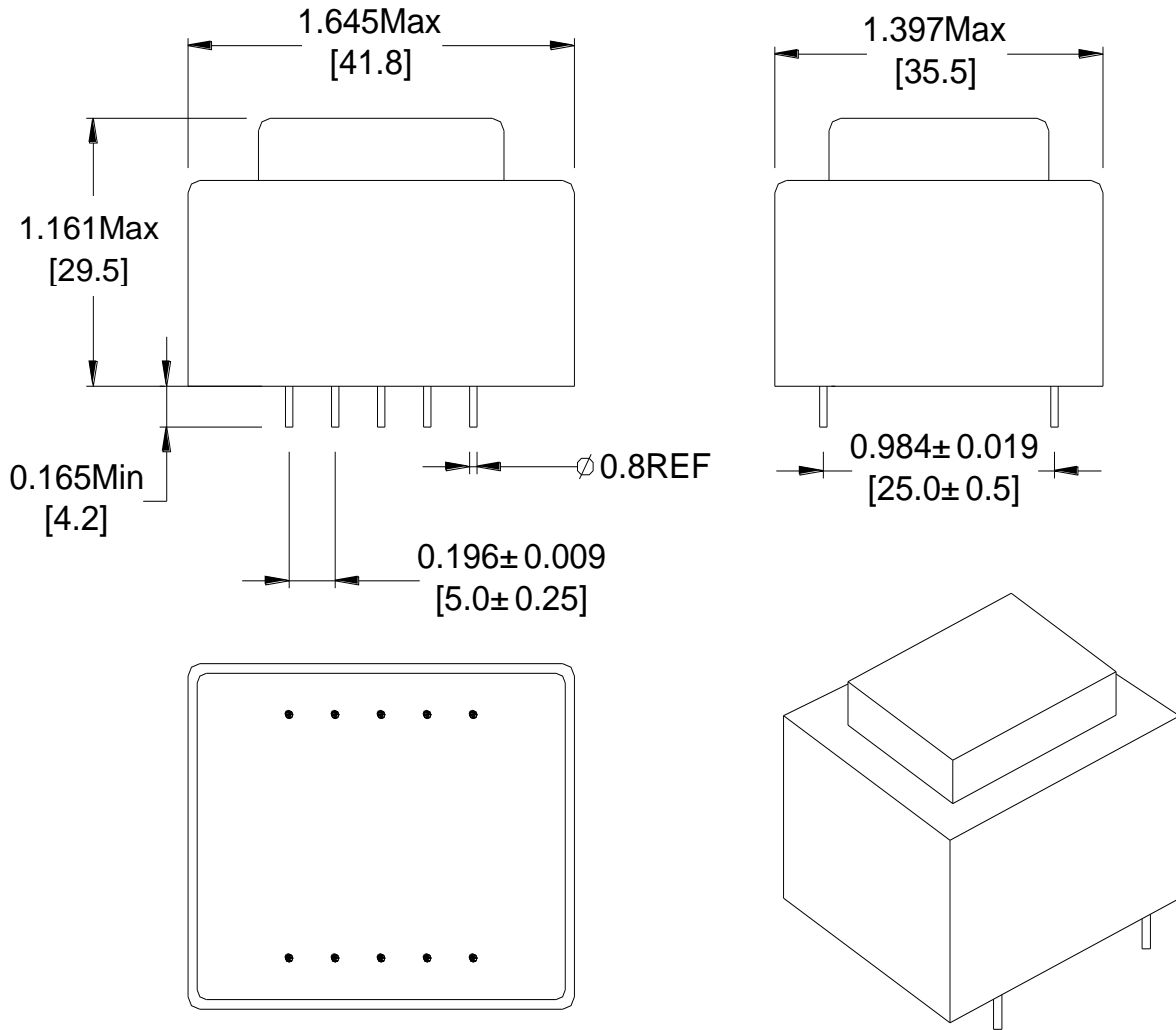

SCHEMATIC DIAGRAM:

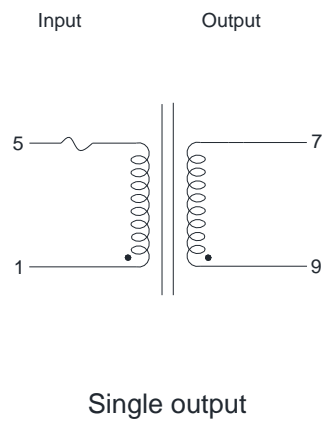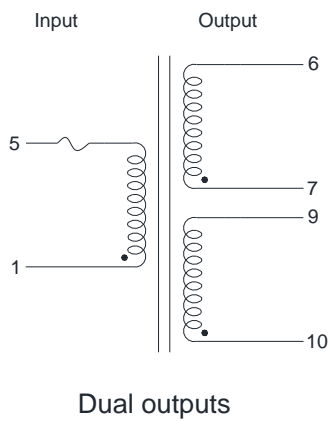

ELECTRONIC SPECIFICATIONS

| Order Number | Input Voltage (Vac) | No-load Voltage (Vac) | SEC. Voltage (Vac) | Rated Current (mA) | Rated Power (VA) | Ambient TEMP. (°C) | Weight (g) | Certificate | |
|----------------|---------------------|-----------------------|--------------------|--------------------|------------------|--------------------|------------|-------------|----|
| | | | | | | | | CQC | CE |
| CMP382S0320601 | 220V | 8 | 6 | 533 | 3.2VA | T 70 B | 150g | | |
| CMP382S0320901 | 220V | 12 | 9 | 356 | 3.2VA | T 70 B | 150g | | |
| CMP382S0321001 | 220V | 14 | 10 | 320 | 3.2VA | T 70 B | 150g | | |
| CMP382S0321201 | 220V | 16 | 12 | 267 | 3.2VA | T 70 B | 150g | | |
| CMP382S0321501 | 220V | 20 | 15 | 213 | 3.2VA | T 70 B | 150g | | |
| CMP382S0321801 | 220V | 24.1 | 18 | 178 | 3.2VA | T 70 B | 150g | | |
| CMP382S0322401 | 220V | 32.4 | 24 | 133 | 3.2VA | T 70 B | 150g | | |
| CMP382D0320601 | 220V | 2X8.0 | 2X6 | 2X267 | 3.2VA | T 70 B | 150g | | |
| CMP382D0320901 | 220V | 2X12.0 | 2X9 | 2X178 | 3.2VA | T 70 B | 150g | | |
| CMP382D0321001 | 220V | 2X14 | 2X10 | 2X160 | 3.2VA | T 70 B | 150g | | |
| CMP382D0321201 | 220V | 2X16.0 | 2X12 | 2X133 | 3.2VA | T 70 B | 150g | | |
| CMP382D0321501 | 220V | 2X20 | 2X15 | 2X107 | 3.2VA | T 70 B | 150g | | |
| CMP382D0321801 | 220V | 2X24.1 | 2X18 | 2X89 | 3.2VA | T 70 B | 150g | | |
| CMP382D0322401 | 220V | 2X32.4 | 2X24 | 2X67 | 3.2VA | T 70 B | 150g | | |