



ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
VIEWING DIRECTION	TRANSMISSIVE, POSITIVE
	TRANSMISSIVE, NEGATIVE
LED BACKLIGHT	6 O'CLOCK
	12 O'CLOCK
	WHITE
	YELLOW-GREEN
	RED
	GREEN
TEMPERATURE RANGE	BLUE
	AMBER
CHARACTER PATTERNS	-
	STANDARD TEMPERATURE
	WIDE TEMPERATURE
OPERATING VOLTAGE	5.0V
LCD DRIVING VOLTAGE	4.5V
LCD DRIVE METHOD	1/16 DUTY 1/5 BIAS
LCD DRIVE IC	ST7066U

-	BL-
+	BL+
14	DB7
13	DB6
12	DB5
11	DB4
10	DB3
9	DB2
8	DB1
7	DB0
6	E
5	R/W
4	RS
3	V0
2	VDD
1	VSS
PIN	SYMBOL

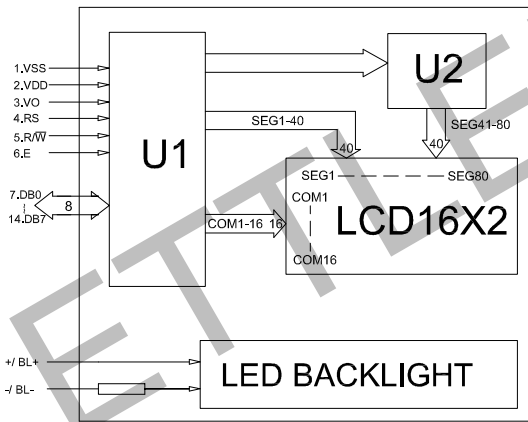

DISPLAY PATTERN

THE PART NUMBER IN MASS PRODUCTION

- 1.STN(Y-G),TRANSFLECTIVE LCD;Y-G BACKLIGHT;6 O'CLOCK;
- 2.FSTN,TRANSFLECTIVE LCD;WHITE BACKLIGHT;6 O'CLOCK;
- 3.STN(BLUE),TRANSMISSIVE LCD;WHITE BACKLIGHT;6 O'CLOCK;
- 4.STN(GRAY),TRANSFLECTIVE LCD;Y-G BACKLIGHT;6/12 O'CLOCK;

UNIT	MM	TOLERANCE	X.X = ±0.3
3RD ANGLE		X.XX = ±0.20	ANG = -
SCALE:	1:1		
DRAWN:			
CHECKED:			
APPROVED:			

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM	
MODEL NO:	ACM1602E SERIES	REV A
PART NO:		SH NO 1/1