



-	BL- 0V
+	BL+ +4.2V
14	DB7
13	DB6
12	DB5
11	DB4
10	DB3
9	DB2
8	DB1
7	DB0
6	E
5	R/W
4	RS
3	V0
2	VDD
1	VSS
PIN	SYMBOL

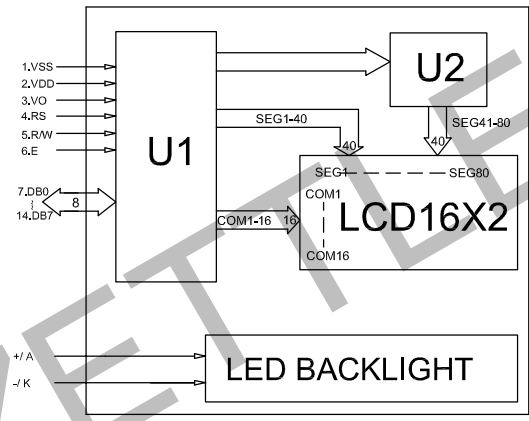

DISPLAY PATTERN

ITEM	SELECTABLE CONTENTS
DISPLAY MODE	STN YELLOW MODE
	STN GRAY MODE
	STN BLUE MODE
	FSTN
POLARIZER TYPE	REFLECTIVE
	TRANSFLECTIVE
VIEWING DIRECTION	TRANSMISSIVE, POSITIVE
	TRANSMISSIVE, NEGATIVE
LED BACKLIGHT	6 O'CLOCK
	12 O'CLOCK
	WHITE
	YELLOW-GREEN
	RED
	GREEN
TEMPERATURE RANGE	BLUE
	AMBER
TEMPERATURE RANGE	-
	STANDARD TEMPERATURE
CHARACTER PATTERNS	WIDE TEMPERATURE
OPERATING VOLTAGE	5.0V
LCD DRIVING VOLTAGE	4.5V
LCD DRIVE METHOD	1/16 DUTY 1/5 BIAS
LCD DRIVE IC	ST7066U

THE PART NUMBER IN MASS PRODUCTION

- 1.STN(Y-G),TRANSFLECTIVE LCD;Y-G BACKLIGHT;6 O'CLOCK;
- 2.FSTN, TRANSFLECTIVE LCD;WHITE BACKLIGHT;6 O'CLOCK;
- 3.STN(BLUE),TRANSMISSIVE LCD;WHITE BACKLIGHT;6 O'CLOCK;
- 4.--

UNIT	MM	TOLERANCE	X. X = ± 0.3
3RD ANGLE		X. XX = ± 0.20	ANG = -
SCALE:	1:1		
DRAWN:			
CHECKED:			
APPROVED:			

ZETTLER DISPLAYS

XIAMEN ZETTLER ELECTRONICS CO., LTD.

TITLE:	LCM	
MODEL NO:	ACM1602T SERIES	REV A
PART NO:		SH NO 1/1